

Sliding Door Fittings



- Pre-assembled
- Simple, intuitive installation
- | For wall or ceiling mounting
- Available for 50 kg or 80 kg

- Revolutionary rolling properties
- With double-sided soft closing system
- | Sophisticated clamping technology
- | No glass processing required







AREYOU READY FOR BANANA SLIDE?

Yeaaaahhh - bonono slide. At last an end to Premium, Master, and FCK100. Sliding is finally becoming cool. It's never been easier to mount and move a door. Banana Slide by ON**LEVEL** offers the suitable solution for almost any installation situation. Whether for ceiling or wall mounting, for 50 kg or 80 kg doors (150 kg available upon request) – Banana Slide:

- | Very simple damper installation
- | Clip-on cover, no further installation steps required from the rear
- I No glass processing required
- | Sophisticated clamping technology
- | Permanent connection between roller and carriage
- | Simple and smooth door adjustment from the front
- | Height adjustable release bolt as no wall is perfectly straight
- | Minimum wall distances, only a sheet of paper will fit in between
- | Minimum door width of 700 mm for soft closing system
- | One-part rattle-free bottom guide for all glass thicknesses

banana slide 50

Fittings for sliding doors of up to 50 kg without fixed sidelight

Snap your finger and it's good.

If your door dimensions are below 2000 x 1000 mm, then Banana Slide 50 is just right for you. Finally more time thanks to Banana Slide: Whether for ceiling or wall mounting – Banana Slide works as easy as can be. Banana Slide not only saves installation time but opens and closes 50 kg sliding doors that easily that you can stay completely cool and only need to snap your finger to make the door move.

Essential Features

- | Glass sliding doors made of tempered glass, glass thicknesses of 8 mm and 10 mm
- | Wooden sliding doors starting from 35 mm
- Aluminium stainless steel look anodised, EV1 anodised or RAL 9005 matt black
- | Compact structure
- Optionally available with soft closing system
- Wall, ceiling, and glass mounting
- | Single or double doors
- | Clip-on cover


Standard available with soft closing system Glass thicknesses of 8 mm and 10 mm

BANANA SLIDE 50 | WALL MOUNTING

Banana Slide 50 Complete Set | Wall Mounting



- Max. door weight 50 kg
- Tempered glass type: 8, 10 mm
- Profile dimensions without sidelight: width 62 mm / height 57 mm
- | Minimum wall distance: 18 mm
- Height adjustment: ±3 mm
- | Minimum door width for double-sided soft closing system: 700 mm
- | Storage lengths: 2000 mm, 2500 mm
- | Door dimensions are determined by the max. door weight and a width-to-height ratio of 1:2.5.
- | Incl. soft closing system
- | Sales unit: 1 piece

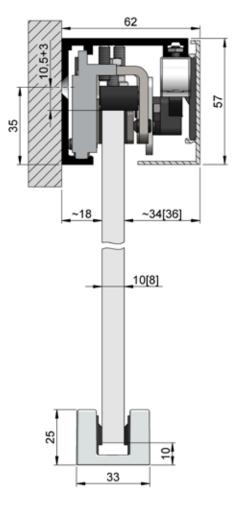


Model 1050	EV1 anodised	Stainless steel look	RAL 9005 matt black
length	Art. no.	Art. no.	Art. no.
2000 mm	25.1055.200.11	25.1055.200.12	25.1055.200.18-JB
2500 mm	25.1055.250.11	25.1055.250.12	25.1055.250.18-JB

BANANA SLIDE 50 | CEILING MOUNTING

Banana Slide 50 Complete Set | Ceiling Mounting



- Max. door weight 50 kg
- Tempered glass type: 8, 10 mm
- | Profile dimensions without sidelight: width 62 mm / height 57 mm
- | Height adjustment: ±3 mm
- | Minimum door width for double-sided soft closing system: 700 mm
- | Storage lengths: 2000 mm, 2500 mm
- Door dimensions are determined by the max. door weight and a width-to-height ratio of 1:2.5.
- | Incl. soft closing system
- | Sales unit: 1 piece

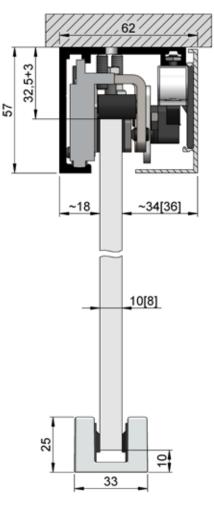

Model 1050	EV1 anodised	Stainless steel look	RAL 9005 matt black
length	Art. no.	Art. no.	Art. no.
2000 mm	25.1050.200.11	25.1050.200.12	25.1050.200.18-JB
2500 mm	25.1050.250.11	25.1050.250.12	25.1050.250.18-JB

banana slide 80

Fittings for sliding doors of up to 80 kg without fixed sidelight

Slide up your Life.

If you are rather a banana slider than a banana bender, you are spot on with Banana Slide for 80 kg doors. Despite its relatively high weight, Banana Slide can be moved particularly easily. It can be fixed to the ceiling or wall that easily that it saves you time and unnecessary frustration for a complicated and tiresome installation.

Essential Features

- | Glass sliding doors made of tempered glass, glass thicknesses of 8 mm and 10 mm
- | Glass sliding doors made of laminated safety glass, glass thicknesses of 8.76 mm and 10.76 mm
- | Wooden sliding doors starting from 35 mm
- Aluminium stainless steel look anodised, EV1 anodised or RAL 9005 matt black
- Compact structure
- Optionally available with soft closing system
- | Wall, ceiling, and glass mounting
- | Single or double doors
- | Clip-on cover




BANANA SLIDE 80 | WALL MOUNTING

Banana Slide 80 Complete Set | Wall Mounting



- | Max. door weight 80 kg
- | Tempered glass type: 8, 10 mm
- | Laminated safety glass type (made of 2x tempered glass): 8.76 + 10.76 mm
- | Minimum wall distance 19 mm
- Height adjustable ±3 mm
- | Minimum door width for double-sided soft closing system: 700 mm
- Door dimensions are determined by the max. door weight and a width-to-height ratio of 1:2.5.
- | Sales unit: 1 piece

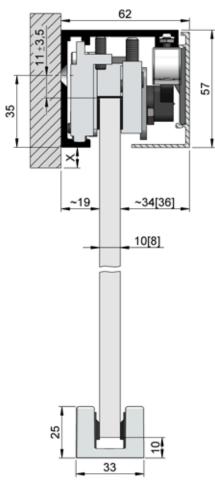


Model 1085	EV1 anodised	Stainless steel look	RAL 9005 matt black
length	Art. no.	Art. no.	Art. no.
2000 mm	25.1085.200.11	25.1085.200.12	25.1085.200.18-JB
2500 mm	25.1085.250.11	25.1085.250.12	25.1085.250.18-JB
3000 mm	25.1085.300.11	25.1085.300.12	-

BANANA SLIDE 80 | CEILING MOUNTING

Banana Slide 80 Complete Set | Ceiling Mounting



- | Max. door weight 80 kg
- Tempered glass type: 8, 10 mm
- Laminated safety glass type (made of 2x tempered glass): 8.76 + 10.76 mm
- | Height adjustable ±3 mm
- | Minimum door width for double-sided soft closing system: 700 mm
- Door dimensions are determined by the max. door weight and a width-to-height ratio of 1:2.5.
- | Sales unit: 1 piece

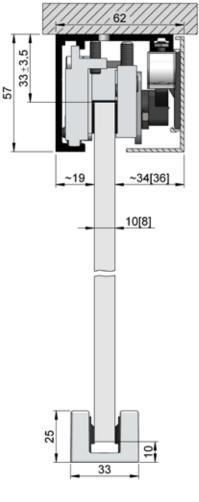

Model 1085	EV1 anodised	Stainless steel look	RAL 9005 matt black
length	Art. no.	Art. no.	Art. no.
2000 mm	25.1080.200.11	25.1080.200.12	25.1080.200.18-JB
2500 mm	25.1080.250.11	25.1080.250.12	25.1080.250.18-JB
3000 mm	25 1080 300 11	25 1080 300 12	

BANANA SLIDE | ACCESSORIES

Banana Slide Wood Flange Pair



Door thicknesses from 35 mm With bottom guide Material: plain aluminium anodised | Sales unit: 1 piece

Model 9000	
Door weight	Art. no.
50 kg	25.9000.050.11
80 kg	25.9000.080.11

Banana Slide Flush Handle



| Ø 65 mm | Glass thickness: 8 - 10.76 mm | Sales unit: 1 piece

Model 2010	EV1 anodised	Stainless steel look	RAL 9005 matt black
	Art. no.	Art. no.	Art. no.
	25.2010.065.11	25.2010.065.12	25.2010.065.18-JB

Banana Slide Door Handle Pair




Ø 20 mm Length: 350 mm | Sales unit: 2 pieces

Model 2020	EV1 anodised	Stainless steel look	RAL 9005 matt black
	Art. no.	Art. no.	Art. no.
	25.2020.350.11	25.2020.350.12	25.2020.350.18-JB





INTO THE SLIDE.

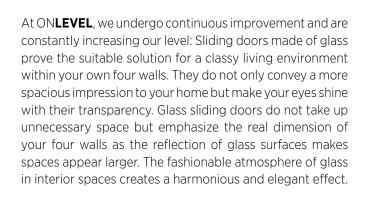

Sliding doors made of satin-finished glass serve for visual protection yet make the room shine. In this way, you can enjoy your privacy amidst openness and brightness.

Sliding doors made of wood from ON**LEVEL** are the ideal substitute for doors in transit areas. Wooden sliding doors do not only form a functional unit between rooms, but they also have a positive influence on sound insulation properties when used together with the special accessories. Rooms can therefore be perfectly isolated from each other, both from a design-related and an acoustic point of view.

ONLEVEL

8, Alexandria Court Ashton Commerce Park Ashton-under-Lyne Lancashire OL7 OQN United Kingdom

T +44 0161 804 9500 F +44 0161 804 9505

info@onlevel.com www.onlevel.com